
## PRECISION TRANSFORMERS

By Reichenbach Engineering

output split
609/150:600/150
+23130

## RE-123-ELCF

## CHANNEL MOUNT OUTPUT TRANSFORMER



**RE-123-ELCF MAGNITUDE RESPONSE** 

Impedance Ratio: 600/150 ohms to 600/150 ohms

. Turns Ratio: 1:1

20Hz Max output Level: +23 dBu
30Hz Max output Level: +27 dBu
Bandwidth (-3db point): > 200 kHz

Magnitude Response (20Hz to 20Khz): 0.2 db

Recommended Source: O ohms


· DCR: 20 ohms per winding

· Recommended RC network: none


NOTE: All transformers formerly sold under the Jensen Transformers name are the design and manufacture of Reichenbach Engineering.

Specifications subject to change without notice or obligation

©1991 BCI

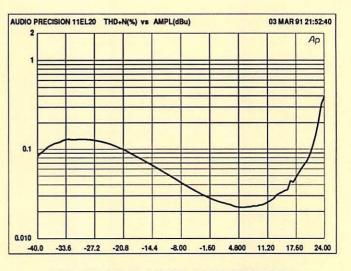

RE-123-ELCF 20Hz DISTORTION

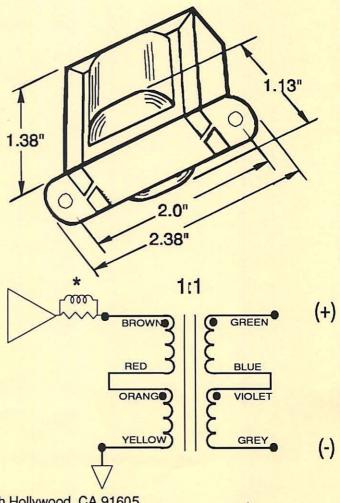

6887 Farmdale Avenue, Bldg.12, North Hollywood, CA 91605 (800) 627-7277 (818) 891-9983 FAX (818) 894-0715